

AUX

Portable AC & Dehumidifier



C O N T E N T S

AUX

Portable AC Introduction.

01. **Product Introduction**

02. **Feature**

Future Product Line

Area	Lineup	ON-OFF/ INVERTER	Cool / Heat	Capacity	Platform	Picture
Europe	Front Discharge	ON-OFF	Cooling Only	7K/9K	D	
	Top Discharge	ON-OFF	Cooling Only	9K/14K	M	
			Cooling&Heating	9K/14K		
			Cooling Only	12K	Q	
			Cooling&Heating	12K		
		Inverter	Cooling Only	12K		

D Series

D

Portable

Panel : DA/DB/DF





DA



black



grey



white



black



grey



white



black



white

Parameters

AUX

D Series	European Market	
Capacity	7000Btu/h	9000Btu/h
Power Input	788 W	1000 W
EER	A/2.6	A/2.6
Power Supply	220-240V/50Hz	
Air Volume	320m³/h	
Noise Level	≤64dB(A)	≤64dB(A)
Refrigerant	R290	
Net Dimension	358×310×682	
Packing Dimension	385×360×885	
Loading Qty. (pcs) 20/40/40HQ	192/396/594	
Net Weight	23kg	24kg
Gross Weight	27kg	27.5kg



PORTABLE DF

AUX
AIR CONDITIONING



MAIN SELLING POINTS



INTELLIGENT WIFI

Easily use the app from anywhere to adjust the temperature. Come home to a cool home.

OPTIONAL




WATER ATOMIZATION

Without water tank, automatically fetching water to the condenser, making water evaporate.
Reduce the condensing temperature and power consumption, enhancing the condensation efficiency.



AUTO-RESTART

If the AC is interrupted due to a power cut, the unit will restart with the previous function settings automatically when the power resumes.

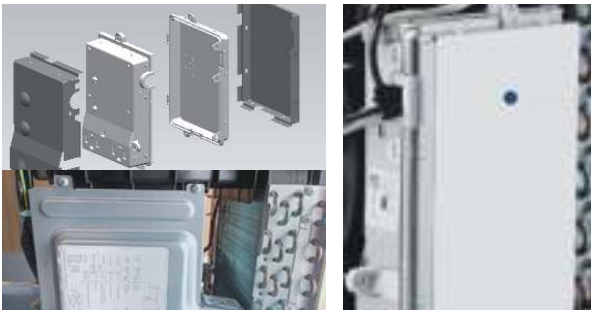

IRON SECURITY CONTROLLER BOX

Double protection Sheet metal + 5VA plastic
Prevent from dust/fire/insects

SPECIFICATIONS

DF	European Market	
Capacity	7000Btu/h	9000Btu/h
Power Input	788 W	1000 W
EER	A/2.6	A/2.6
Power Supply	220-240V/50Hz	
Air Volume	330m3/h	
Noise Level	≤64dBW(A)	≤64dBW(A)
Refrigerant	R290	
Net Dimension	350×310×680	
Packing Dimension	385×360×885	
Loading Qty.(pcs) 20/40/40HQ	192/396/594	
Net Weight	20kg	23.5kg
Gross Weight	23kg	26kg



Remark:
1.All specifications are subject to change by the manufacturer without prior notice.
2.All units are being tested and comply to EN 14825:2018.
3.Sound pressure levels are measured in anechoic chamber.
During actual operation, sound pressure level will be higher as a result of room specification condition .
4.Data from AUX lab, Data may vary based on conditions; AUX reserves the right to update.



www.auxair.com



Function



Standard Function




cool



dehumidifier



fan



timer



sleep



speed



casters



water full

Optional Function



WiFi

M Series

AUX

M

Portable

Panel :

MA/MC/MF/MI/MJ/MK



Panel



MA



grey



white



grey+white

Panel



MC



grey



white



grey+white

Panel



Optional :
golden
grey
black

MF



white



grey+white

Panel



MI



grey



white



grey+white

Panel



MJ



louver



louver



grill

Panel



MK Only 14K



grey



black

Parameters

M Series	European Market		
Cooling Capacity	9000Btu/h	9000Btu/h	14000Btu/h
Heating Capacity	/	8000Btu/h	11000Btu/h
EER	A/2.6	A/2.6	A/2.6
Power Supply	220-240V/50Hz		
Air Volume	340m³/h	340m³/h	450m³/h
Noise Level	≤65dBW (A)	≤64dBW (A)	≤65dBW (A)
Refrigerant	R290		
Net Dimension	415×345×710	476×385×710	493×415×802
Packing Dimension	470×385×885	545×435×885	570×515×885
Loading Qty. (pcs) 20/40/40HQ	146/300/458	110/228/342	88/184/275
Net Weight	29kg	32kg	36kg
Gross Weight	32kg	37kg	41kg



Function



Standard Function




cool



heat



fan



timer



sleep



swing



casters



water full

Optional Function



WiFi

Q Series

AUX

Q

Portable



Panel : QA

Panel



QA



black



grey



white

Parameters

Q Series	European Market		
Cooling Capacity	12000Btu/h	12000Btu/h	12000Btu/h
Heating Capacity	/	9500Btu/h	/
EER	A/2.6	A/2.6	A+/3.1
Power Supply	220-240V/50Hz on-off		220-240V/50Hz inverter
Air Volume	450m ³ /h		450m ³ /h
Noise Level	≤64dBW (A)		≤64dBW (A)
Refrigerant	R290		R290
Net Dimension	452×403×794		452×403×794
Packing Dimension	497×445×885		497×445×885
Loading Qty. (pcs) 20/40/40HQ	158/331/372		158/331/372
Net Weight	32kg	33kg	35kg
Gross Weight	34kg	35kg	37kg



Function



Standard Function




cool



heat



dehumidifier



timer



sleep



swing



casters



water full

Optional Function



WiFi

C O N T E N T S




Portable AC Introduction

01. **Product Introduction**

02. **Feature**


Iron Security Controller Box

- **Double protection**
Sheet metal + 5VA plastic
- **Prevent Dust**
- **Prevent Fire**
- **Prevent Insects**

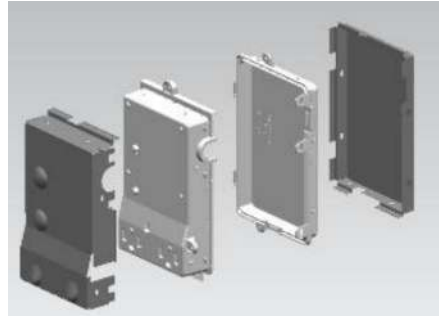

Self-evaporation system

- Continuous running for 8h (RH80%)
- Splash water to condenser and vaporize
- Reduce the condenser's temperature and improve heat exchange efficiency

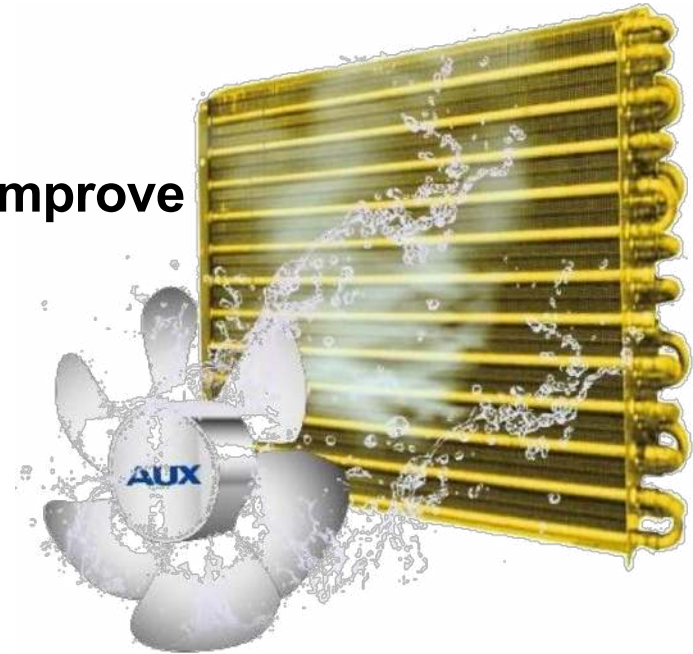

Environmentally Friendly Package


Front view	Back view	Left view	right view
			

Two solutions for the plastic limit, compliant with FSC certification.
 Pulp package (with staples, firm and reliable)
 Cardboard package (without staples, easy to recycle)




Integral Design

- **Pre-installed exhaust duct**
- **Expansion window kit**

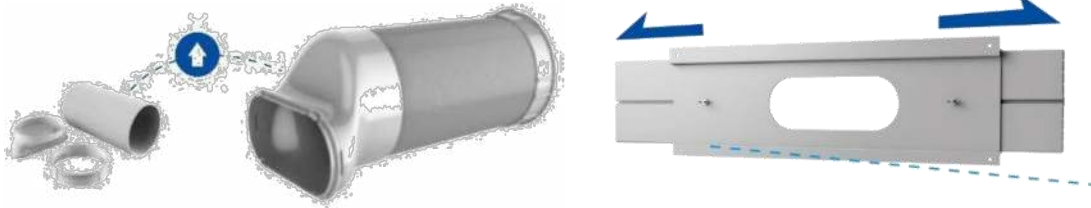

Universal Jack & Hook

- **Meet the requirements of different countries**
- **Convenient to place the power cord**

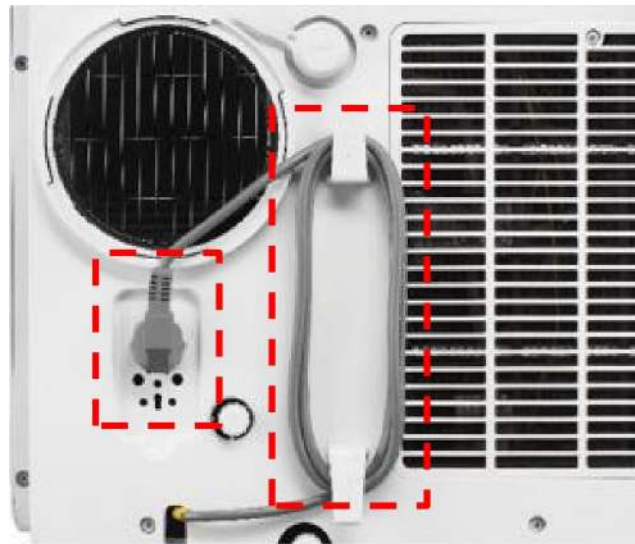

Auto-Restart

- **Power outages memory**
- **Record user's setting, mode**
- **Auto reset setting**




WiFi Control

- **Easy for installation**
- **Remote control by mobile phone**
- **Support Alexa, Google Home Assistant, and so on**



Water Level Protection

- **Monitor water level**
- **Automatic shutdown when the tank is full**
- **Make a "bee" sound to remind you**

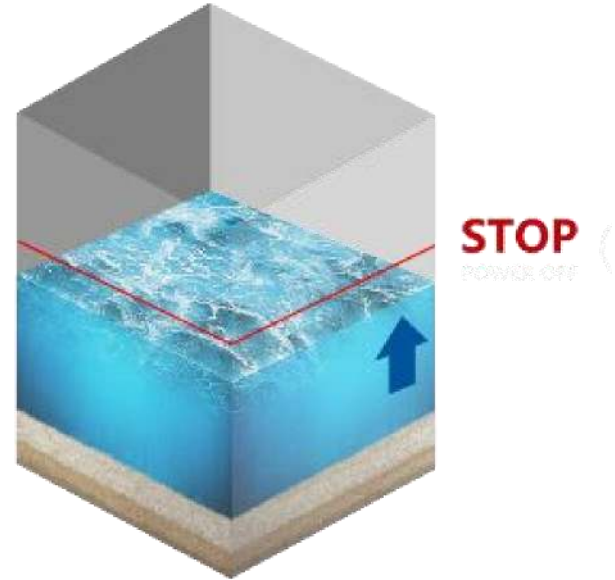

C O N T E N T S

AUX

Dehumidifier Introduction

01. Product Introduction

02. Feature

DEHUMIDIFIER T SERIES



FEATURES

ANNULAR OUTLET DESIGN

With a more uniform airflow, the dehumidification effect is significantly enhanced. This ensures that moisture is removed more efficiently and evenly from the air, leading to a consistently comfortable environment.



SELF-EVAPORATION SYSTEM

Continuous running for 8h (RH80%)
Splash water to condenser and vaporize and the condenser's temperature, improving heat exchange efficiency.



CONTAINER LOADING

Net Dimension: 235*335*500
Packing Dimension: 285*375*535
Container Loading: 496/1016/1270
Compared to some traditional dehumidifiers, container loading capacity can increase by up to 45%.



1270 only for 22PT


AUTO-RESTART

If the AC is interrupted due to the power cut, the unit will restart with the previous function settings automatically when the power resumes.



IRON SECURITY CONTROLLER BOX

Double protection Sheet metal + 5VA plastic.
Prevent from Dust/Fire/Insects.

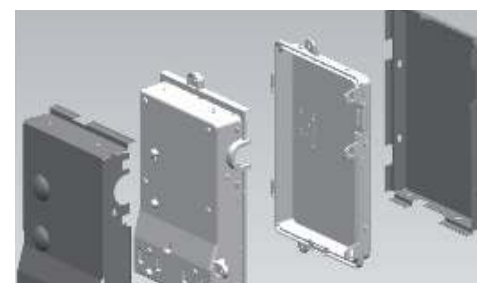

SPANISH SILENCER COTTON DUAL-LAYER

Reduce the noise level from compressor.
Decreasing vibration of the whole unit.



Dehumidifier - Usage Scenario



garage




warehouse



basement



gym

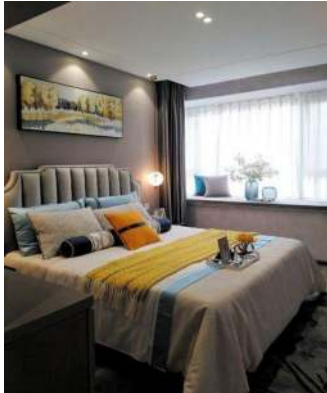

bedroom



c loakroom



shoesroom



bathroom

Aux Product Line

EU Capacity	Platform	Water Tank	Dimension	Loading QTY	Picture
20L	35T	5.5L	375×285×535	1270	
30L					
50L	50T	9L	403×312×665	880	

T

Dehumidifier





black



grey



white



TA-grey





TA-white



Parameters

AUX

T Series	European Market
Dehumidify Capacity	20L
Bucket Capacity	5.5L
Power Supply	220-240V/50Hz
Air Volume	210m³/h
Noise Level	≤50dBW (A)
Refrigerant	R290
Net Dimension	335×235×500
Packing Dimension	375×285×535
Loading Qty. (pcs) 20/40/40HQ	496/1016/1270
Net Weight	15kg
Gross Weight	16kg






Standard Function



dehumidifier



speed



timer



water full



casters

Optional Function



WiFi

C O N T E N T S

AUX

Dehumidifier Introduction

01. Product Introduction

02. Feature

Feature

Annular outlet design

- More uniform air flow
- Better dehumidification effect



Function

- **TIMER ON/OFF**

the time can be set for 1~24h

- **FILTER REMIND**

intelligently remind to clean the filter after 250h

- **WATER FULL ALARM**

turns-off and give an alarm when water tank is full



Feature

Noise

- Large air outlet area
- Efficient and low-noise compressor
- Gale chamber
- Silent pipeline design
- High damping shock-absorbing foot pads
- Design of water diversion reinforcement



Container Loading

- Net Dimension: 235*335*500
- Packing Dimension: 285*375*535
- Container Loading: 496/1016/1270

Compared to traditional dehumidifiers,

container Loading $\uparrow$ 45%



Feature

Water Tank

- Large Capacity Tank


Pour water twice a day at most

- Water Tank Window

Water level can be observed

directly from the outside

- Portable handle

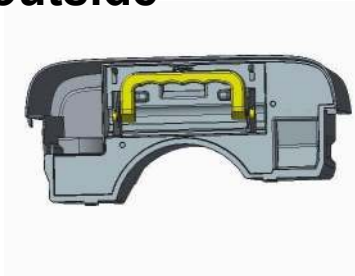

Temperature Limit


- High temperature limit: **38°C**
- Low temperature limit: **3°C**



Liquid level switch

- Magnetic level switch

Using magnetic levitation block and liquid level sensor to accurate monitoring of water level is achieved

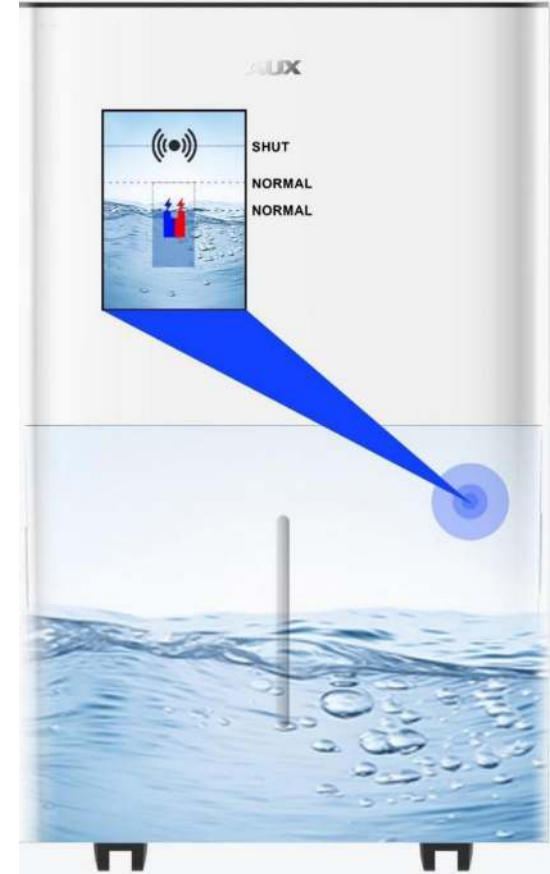

Easy to carry/move

- Handle (left and right side)
easy to carry




- Universal Casters

Nylon material, more wear-resistant

Stainless steel bearing, durable

Larger diameter, easier to move

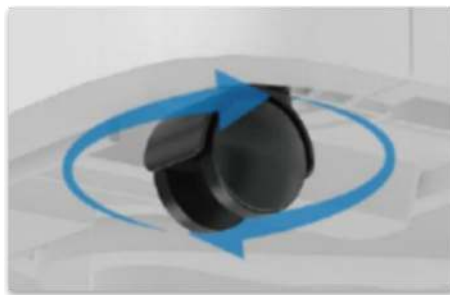

Feature

ANTI-OVERTURNING

- Unique balance design

Overturning Angle ≥ 12 degrees


More stable center of gravity



Overturning Angle

Flame retardant

- The control box is made of flame retardant material

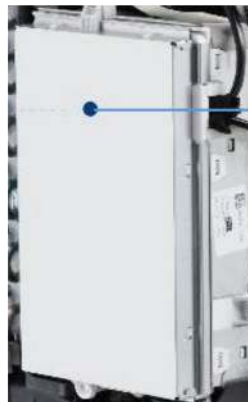

Power cord storage



The power cord can be stored in the water tank or back

Feature

Dobule drainage outlet

- Mid drainage outlet

External leakage design

Water flows out without entering the tank

